





HIAB X-HIPRO 232 BASIC DATA

TECHNICAL DATA	E-3	E-4	E-5	E-6
Max. lifting capacity (ft-lbs)	149 990	146 450	143 330	140 590
Outreach, hydraulic extensions (ft)	34' 11"	41' 10"	49' 6"	56' 10"
Outreach / lifting capacity (ft-lbs)	11' 6" - 13 010 15' 5" - 9 700 21' 4" - 6 830 27' 11" - 5 160 34' 5" - 4 140	11' 6" - 12 790 15' 5" - 9 480 21' 4" - 6 610 27' 11" - 4 890 34' 5" - 3 880 41' 4" - 3 220	11' 10" - 12 130 16' 1" - 8 930 21' 8" - 6 280 28' 3" - 4 630 35' 1" - 3 570 42' 0" - 2 910 49' 3" - 2 470	11' 10" - 10 800 16' 1" - 8 710 22' 0" - 5 950 28' 3" - 4 410 34' 9" - 3 350 41' 8" - 2 690 48' 11" - 2 250 56' 5" - 1 920
Slewing angle (°)	415	415	415	415
Height in folded position (in)	89	89	89	89
Width in folded position (in)	98	98	98	98
Installation space needed (in)	42	42	42	46
Weight, "standard" crane without stabilizers (lbs)	4 670	4 980	5 250	5 530
Weight, stabilizer equipment (lbs)	600 - 940	600 - 940	600 - 940	600 - 940

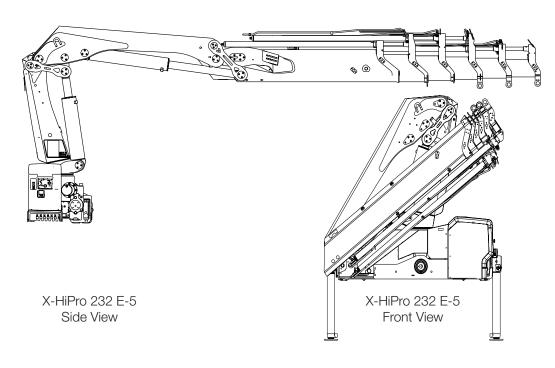



Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts, and MULTILIFT demountables, as well as DEL, WALTCO, and ZEPRO tail lifts.

www.hiab.us.com Hiab is part of Cargotec. www.cargotec.com

Hiab USA Inc 12233 Williams Road Perrysburg, OH 43551 USA tel. 419 482 6000 fax. 419 482 6001

V2016.11.02