

TECHNICAL SPECIFICATIONS

# MOFFETT M5 50.3 NX SERIES




**BUILT TO PERFORM**



# MOFFETT

# MOFFETT M5 50.3 **NX** SERIES

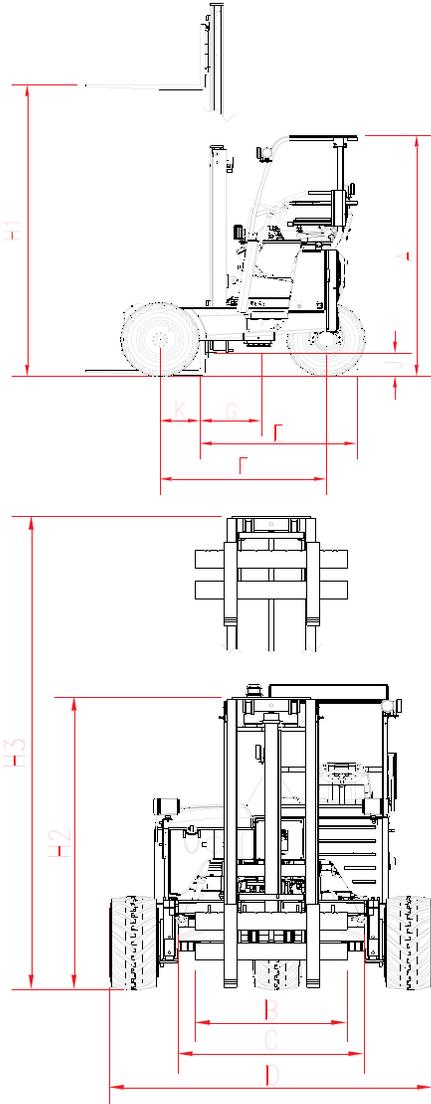

TECHNICAL SPECIFICATIONS		STANDARD	HIGH FLOATATION
1	Capacity @ 24" load center (lbs)	5 000	5 000
2	Kubota diesel engine (hp)	48	48
2a	Engine emission compliance	EPA Tier 4 Final	EPA Tier 4 Final
3	Maximum engine RPM	2 750	2 750
4	Electrical System (V)	12	12
5	Drive wheels	3	3
6	Steering	Hydrostatic	Hydrostatic
7	Front tire type (tread)	29 x 12.5 - 15, 8-ply (TG)	31.5 x 13 - 16.5, 8-ply (SS)
	Rear tire type (tread)	29 x 12.5 - 15, 8-ply (TG)	31 x 15 - 15, 8-ply (TG)
8	Tire, outside diameter (in)	29	31
9	Tire, width (in)	12.5	F 13 / R 15
10	Maximum speed (mph)	7	7
11	Maximum gradability (%)	30	30
12	Turning radius (in)	81	81
13	Unladen weight (lbs)	5 150	5 150
13a	Unladen weight (lbs)	5 290	5 290
14	Working pressure for attachments (psi)	2 500	2 500
15	Tilt of mast [forward/backward] (°)	7 / 6	7 / 6
16	Sideshift (in)	5	5
17	Fork section (in)	45 x 4 x 1.75	48 x 4 x 1.75
18	Mast carriage travel (in)	35.5	35.5
19	Counterweights	n/a	n/a
A	Height to top of overhead guard (in)	97	98
B	Fork carriage width [class] (in)	47.25 [CL II]	47.25 [CL II]
C	Frame opening (in)	60.5	60.5
D	Overall width (in)	100	99.5
E	Overhang [rear wheel turned 180°] (in)	56	56
F	Wheelbase (in)	68	68
G	Center of gravity from fork face (in)	15.5	15.5
H1	Lift height (in)	120	120
H2	Mast height - collapsed (in)	97	98
H3	Mast height - raised (in)	155.5	157.5
H1a	Lift height (in)	144	144
H2a	Mast height - collapsed (in)	109	110
H3a	Mast height - raised (in)	181.5	182.5
J	Ground clearance (in)	9.5	10.5
K	Face of fork to center of front tire (in)	20	20
L	ANSI standard	B56.14	B56.14

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts, and MULTILIFT demountables, as well as DEL, WALTCO, and ZEPRO tail lifts.

www.hiab.us.com  
Hiab is part of Cargotec.  
www.cargotec.com

NOTES: SF= Super Float, SS=Skid Steer, TG=Tractor Grip, RT=Rough Terrain.  
Diagrams shown are for measurement reference and may not reflect actual model.  
Weights may vary depending on tire and/or fork option and are exclusive of (do not include) forks.  
The above specifications are not binding upon the manufacturer and may be changed without prior notice.



In less than a minute, the Moffett can mount or dismount a truck or trailer and be ready for work.

hiab.us.com

Hiab USA Inc  
12233 Williams Road  
Perrysburg, OH 43551 USA  
tel. 419 482 6000  
fax. 419 482 6001

hiab.us.com



V2018.12.07