
Hydraulic Load Hooks

Hydraulic Hook KM 920-5 for tools and loads with ring system

- ▷ Low overall height due to compact design.
- ▷ Precise positioning in combination with KINSHOFER rotator.
- The safety load hook is equipped with a hydraulic cylinder for opening/closing without opening unintentionally in a loaded condition.
- Suitable for the hydraulic suspension of pallet forks with vertical crane hook suspension or with additional hook (verson B) for the fast and precise load suspension with e.g. tightropes, lashing straps, etc. and the following release of the loads (version C w/o additional hook).

| Туре | Width (in) | Load capacity (lbs) | max. Ring - Ø (in) | Height (incl. rotator) (in) | Self weight (lbs) | Operating pressure at oil flow |
|-------------|---------------|---------------------------|-----------------------|-----------------------------------|-------------------------|-----------------------------------|
| KM 920-5B c | 12.2 | 9900 | 1.2 | 18.9 | 1056 | 5350 psi at 1.3 - max. 2.5 GPM |
| КМ 920-5С с | 12 | 9900 | 1.2 | 18.9 | 1037 | 5350 psi at 1.3 - max. 2.5 GPM |

Package consists of: hydraulic hook, rotator KM 04 F, short connection hoses KM 203 01, upper suspension KM 501 4500, non-return valve

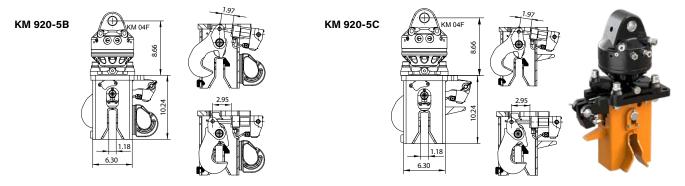

Hydraulic hook KM 920-4 for containers and loads with ring system


The hydraulic hook facilitates the fast and precise lifting and loosening of containers and loads with ring system.

- ▷ Precise positioning in combination with KINSHOFER rotator.
- ▷ Low overall height due to compact design.
- ▷ Robust mechanics with hydraulic cylinder (open/close).
- ▷ V-shaped cutout facilitates ring suspension.
- ▷ Vertical oil duct to recommended rotator without open hydraulic hoses.

| Туре | Width | Height (incl. rotator) | max. Ring - Ø | Self weight (incl. rotator) | max. Load capacity | Operating pressure at oil flow |
|------------|-------|---------------------------|------------------|-----------------------------|-----------------------|-----------------------------------|
| | (in) | (in) | (in) | (lbs) | (lbs) | |
| KM 920-4 c | 10.4 | 23.3 | 1.5 | 101.2 | 5500 🔨 | 2900 psi at 1.3 - max. 2.5 GPM |
| | | | | | / ; \ | |

Package consists of: hydraulic hook, rotator KM 04 F140-30V, upper suspension KM 501, non-return valve

Technical drawings & Picture

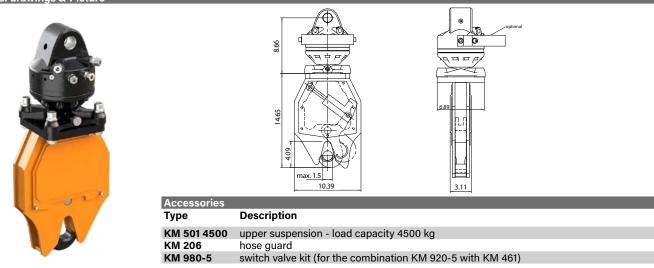

KM 920-5 / KM 920-4

KM 920-5B