





EFFER IQ.1400 HP

TECHNICAL SPECIFICATION

EFFER iQ.1400 HP

TECHNICAL DATA	iQ.1400 HP E-9	iQ.1400 HP E-9 JIB 260D-6
Max. lifting capacity (ft-lbs)	726 190	730 910
Outreach, hydraulic extensions (ft)	70	-
Outreach, jib extensions (ft)	-	110
Outreach / lifting capacity (ft - lbs)	10' 5" - 66 140 15' 1" - 48 060 19' 10" - 35 540 25' 0" - 27 210 30' 6" - 21 450 36' 5" - 17 330 42' 8" - 14 300 49' 2" - 12 060 56' 1" - 10 360 63' 1" - 9 080 70' 5" - 8 160	10' 5" - 66 140 15' 1" - 48 060 19' 10" - 35 540 25' 0" - 27 210 30' 6" - 21 450 36' 5" - 17 330 42' 8" - 14 300 49' 2" - 12 060 56' 1" - 10 360 63' 1" - 9 080 70' 5" - 8 160
Jib outreach / lifting capacity (ft - lbs)	- - - - - -	79' 8" - 3 970 84' 3" - 3 660 89' 2" - 3 400 94' 5" - 3 130 99' 4" - 2 940 104' 11" - 2 780 110' 2" - 2 620
Slewing angle (°)	Continuous	Continuous
Height in folded position (in)	114	114
Width in folded position (in)	100	100
Installation space needed (in)	136	136
Weight, "standard" crane without stabilizers (lbs)	27 340	29 873
Weight, stabilizer equipment (lbs)	2 540	2 540

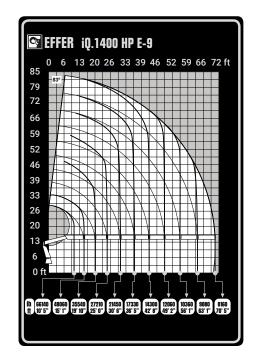



Features

- HP-Drive remote control system
- ASC: Automatic Speed Control .
- VSL: Variable Stability Limit
- LSS-V: Load Stability System
- SAF: Semi Automatic Folding
- PFD: Pump Flow Distribution
- **ProCare**
- nDurance[™] nano technology coating
- **HiConnect**





Hiab is a leading provider of smart and sustainable load handling solutions. We are committed to delivering the best customer experience every day with the most engaged people and partners. Hiab's premium equipment includes HIAB, EFFER and ARGOS loader cranes, MOFFETT and PRINCETON truck mounted forklifts, LOGLIFT forestry cranes, JONSERED recycling cranes, MULTILIFT skiploaders and hooklifts, GALFAB roll-off cable hoists, and tail lifts under the ZEPRO, DEL and WALTCO brands. As the industry pioneer, Hiab continues to make load handling smarter, safer and more sustainable to build a better tomorrow.



Hiab USA, Inc. 12233 Williams Rd Perrysburg, 43551 OH USA tel. +419 482 6000