

TECHNICAL SPECIFICATIONS
HIAB X-HIDUO 158




BUILT TO PERFORM




HIAB X-HIDUO 158 BASIC DATA

TECHNICAL DATA	B-2	B-3	E-3	E-5
Max. lifting capacity (ft-lbs)	104 770	101 080	99 560	94 420
Outreach, hydraulic extensions (ft)	27' 7"	34' 9"	34' 5"	49' 6"
Outreach / lifting capacity (ft-lbs)	9' 6" - 11 020 14' 5" - 7 280 20' 4" - 5 070 26' 7" - 3 860 - -	10' 2" - 9 920 14' 9" - 6 720 20' 8" - 4 740 26' 11" - 3 530 33' 10" - 2 870 -	7' 10" - 12 350 15' 1" - 6 610 21' 0" - 4 630 27' 3" - 3 480 34' 1" - 2 730 -	8' 6" - 11 020 15' 9" - 5 950 21' 8" - 4 100 27' 11" - 2 950 34' 9" - 2 250 42' 0" - 1 810 49' 3" - 1 500
Slewing angle (°)	415	415	415	415
Height in folded position (in)	88	88	89	89
Width in folded position (in)	96	98	95	99
Installation space needed (in)	40	40	41	41
Weight, "standard" crane without stabilizers (lbs)	3 510	3 750	4 210	4 700
Weight, stabilizer equipment (lbs)	540 - 850	540 - 850	540 - 850	540 - 850

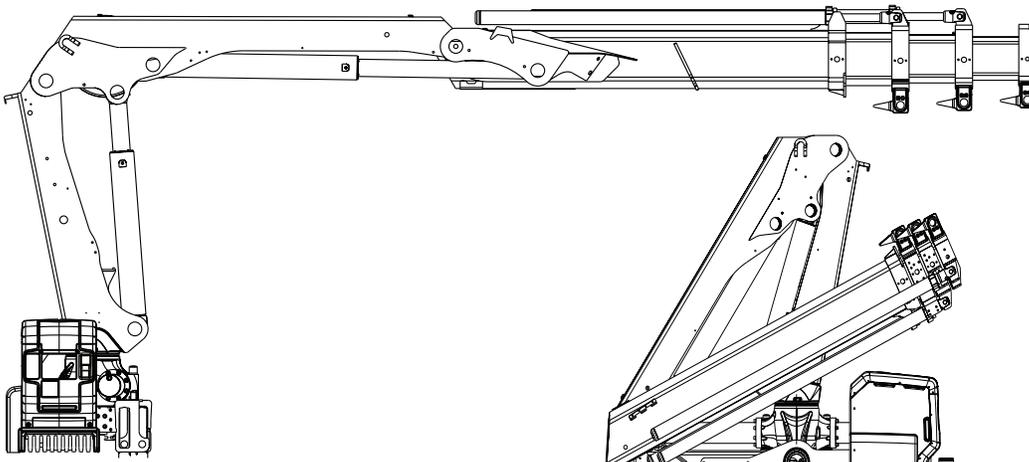

X-HiDuo 158 B-3
Side View

X-HiDuo 158 B-3
Front View

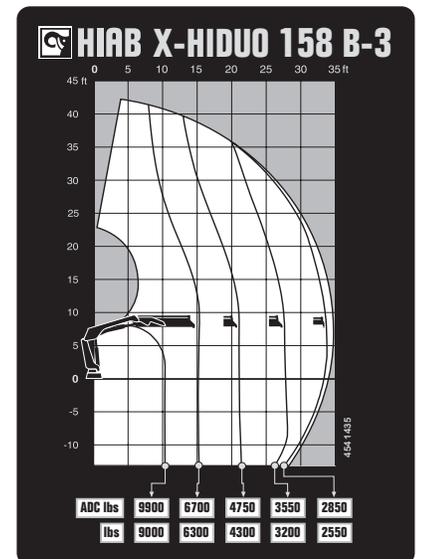

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts, and MULTILIFT demountables, as well as DEL, WALTCO, and ZEPRO tail lifts.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. 419 482 6000
fax. 419 482 6001



V2016.11.02