

JONSERED 1500RZ




BASIC DATA

JONSERED 1500RZ BASIC DATA

TECHNICAL DATA	J1500RZ 80	J1500RZ 82	J1500RZ 95
Max. lifting capacity (ft-lbs)	101 784	102 521	95 146
Outreach, hydraulic extensions (ft)	26' 3"	26' 11"	31' 2"
Outreach / lifting capacity (ft-lbs)	9' 10" - 9 040 13' 2" - 7 050 16' 5" - 5 840 19' 8" - 5 070 23' 0" - 4 320 24' 7" - 4 010	9' 10" - 9 150 13' 2" - 7 170 16' 5" - 5 620 19' 8" - 5 070 23' 0" - 4 230 25' 3" - 3 010	9' 10" - 8 600 13' 2" - 6 610 16' 5" - 5 510 19' 8" - 4 760 23' 0" - 4 060 26' 3" - 3 480 29' 6" - 2 780
Slewing system	Double		
Slewing angle (°)	425		
Slewing torque, gross (ft-lbs)	21 090		
Maximum working pressure (psi)	3 770		
Recommended oil flow - fixed pump (gpm), 1 pump	32		
Recommended oil flow - fixed pump (gpm), 2 pump	2 x 16-21		
Min. recommended oil flow - variable displacement pump (gpm)	42		
Weight - High seat crane with standard stabilizer (lbs)*	5 030	5 160	5 400

*Weight with fixed pump system, oil weight included

Side view

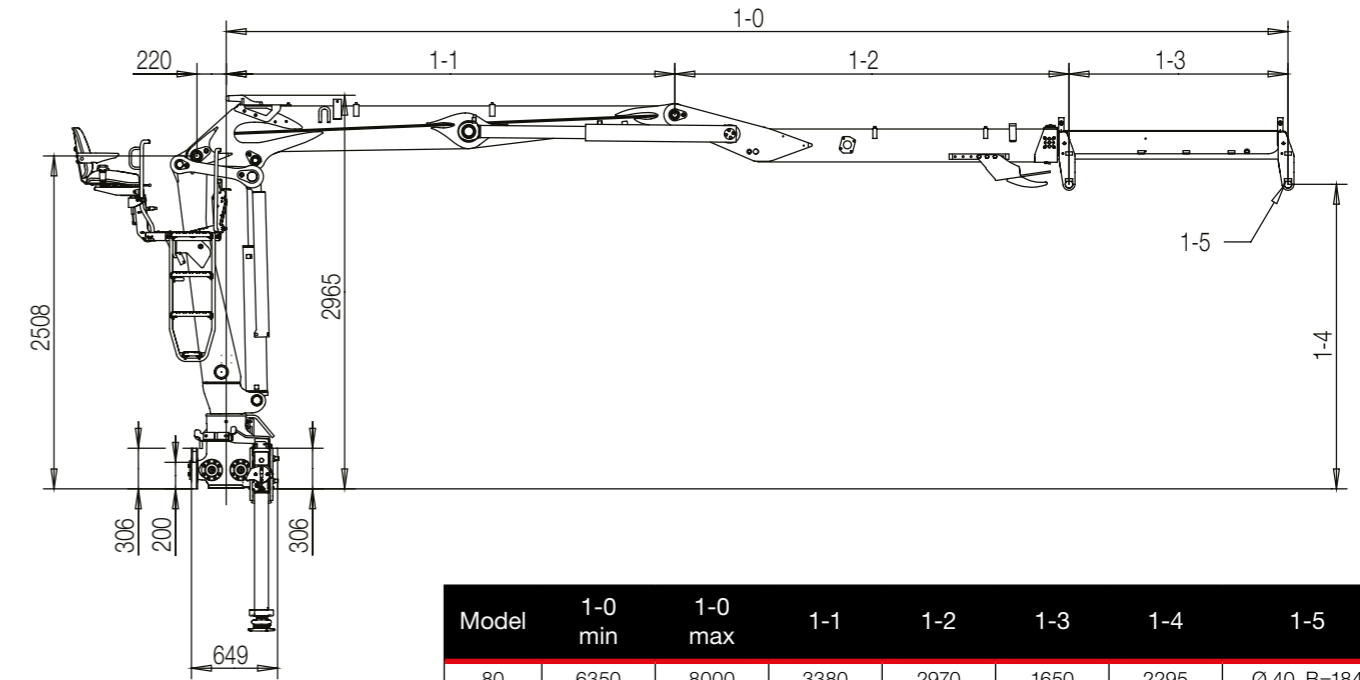

Model	1-0 min	1-0 max	1-1	1-2	1-3	1-4	1-5
80	6350	8000	3380	2970	1650	2295	Ø 40, B=184
82	5667	8187	2880	2787	2520	2234	Ø 40, B=184
95	6510	9470	3380	3130	2960	2233	Ø 40, B=184

For more information,
please visit us at www.hiab.com



BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

BD-J1500FZ-EN-WWW_190208

